
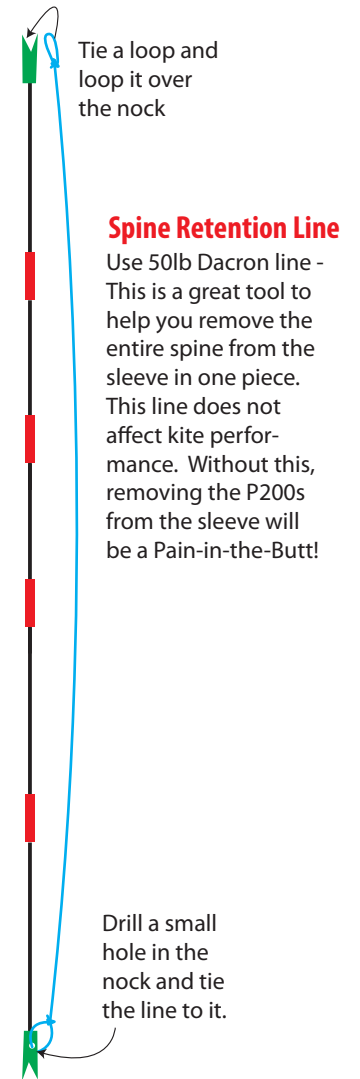


Midi Pointer Framing (Ver. 6)

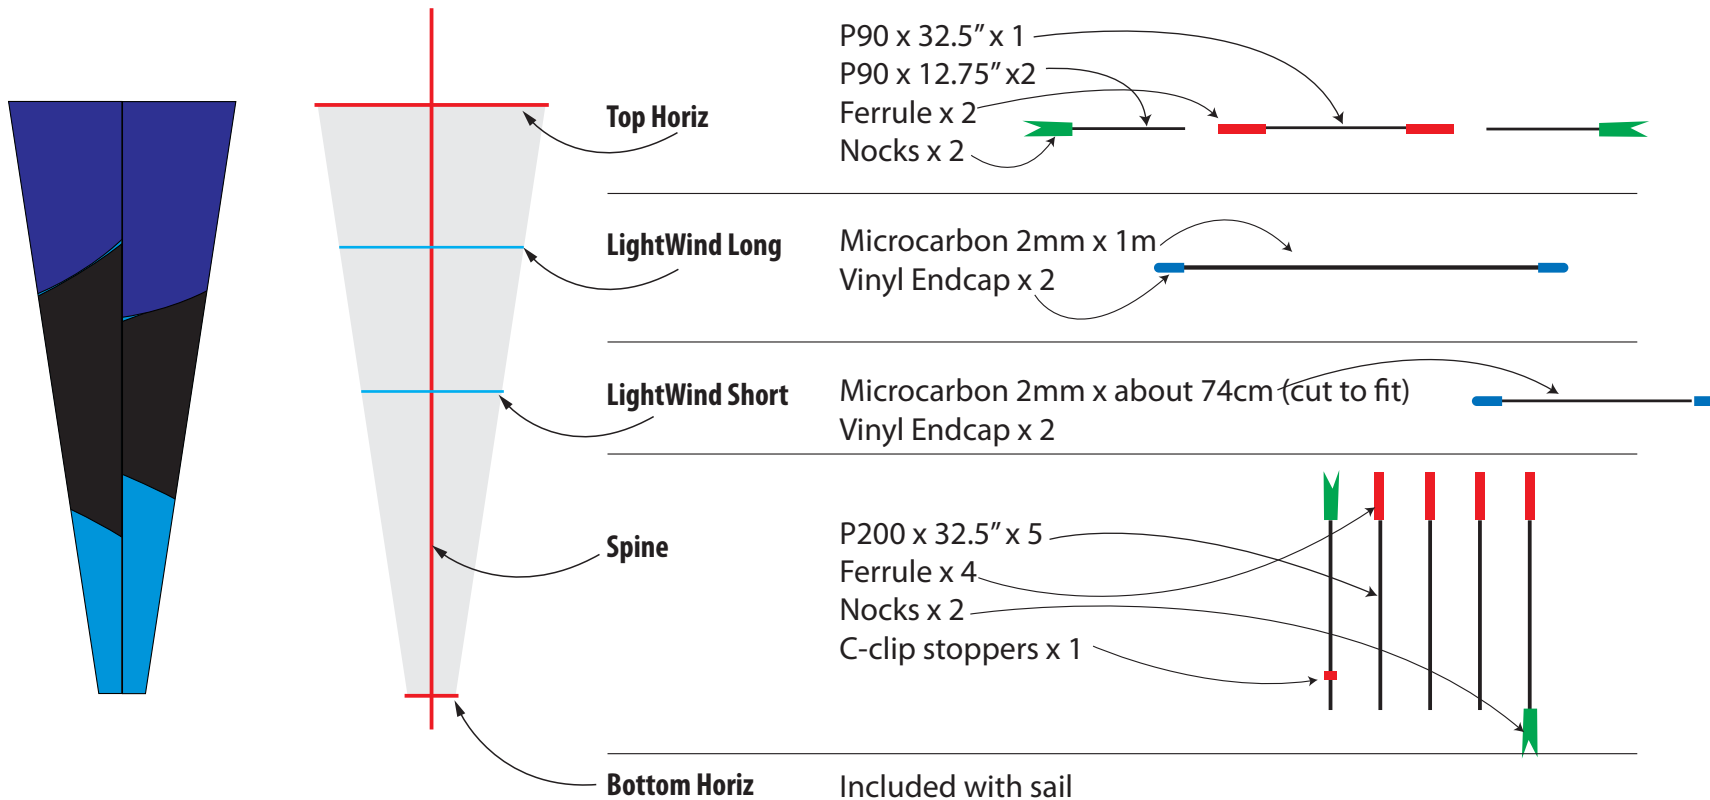

Shopping List:

- 2 x p90s
- 5 x p200s
- 6 x 0.24 solid carbon ferrules
- 2x 100cm 2mm solid rods
- 4 x end caps for the 2mm rods
- 4 x p200 nocks
- 1 x p200 doohinkie (C-clip)


Flying Tips

Fly using the TOP TOW POINT whenever possible (without the Lightwind Microcarbons)

ONLY in extremely light winds (1.5 to 3mph) fly with the LIGHT WIND TOW POINT with both Lightwind Microcarbons

EXPERIMENT with various Tow Point positions by shifting the C-clip in different conditions. Find our favourite settings.

STACKING is easy. Best stacked when wind is sufficient using the TOP TOW POINT. Simply larkhead the flying line to it!

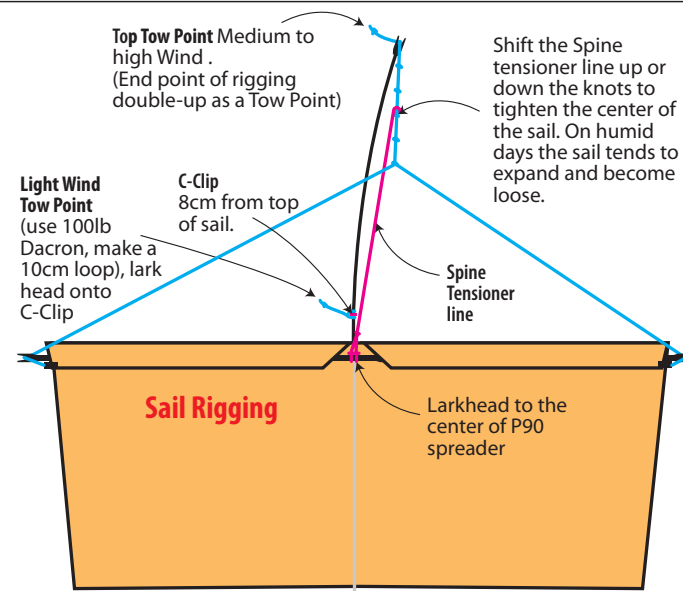

Note:
 Not to scale but you'll get the idea ;-)

July 2010
 Skyshark Version

Copyright
 ceewan@kitemail.com